WIRELESS DMX

INNLED®
#madeinfrance

This new wireless transmitter provides all the same functionnnalities as its predecessor. Fitted with a **colour LCD screen** and a rotary knob, the navigation within the menu is now much simpler.

New modes automatically detect the available channels and avoid interferences.

The choice of the channels becomes elementary and your lamp is connected in a matter of minutes.

1. LCD screen with HF sniffer
2. 31 possible universes
3. 300m open field range

Its LCD colour screen and its rotary knob ensure easier navigation within the menu and offer a better visibility on the frequencies.

The SCAN mode automatically detects the available channels and the frequencies, allowing to analyse the environment.

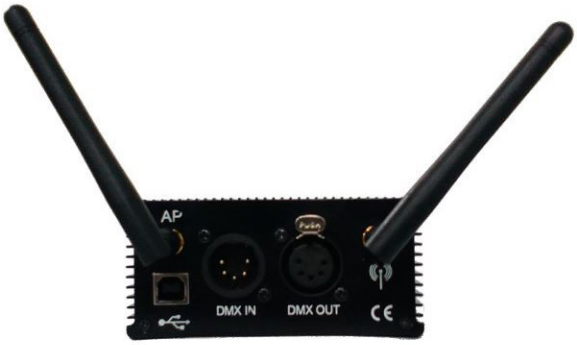

The wireless transmitter is equipped with a DMX input and output, on XLR 5 pins. Its two antennas allow a 300m range wifi connection.
Connect the transmitter to L'APPS, INNLED's mobile application and easily control all your lights.

TECHNICAL SPECIFICITIES

POWER SUPPLY
- By USB port
- DC USB 5V

HF POWER
- (2,4Ghz) : 20db (100mW)

FREQUENCIES
- 21

UNIVERSES AND DMX CHANNELS
- 31
- 15872 channels

ANTENNA
- 1db articulated external
- SMA connector

INPUTS
- USB "OPEN DMX" input
- 5 point XLR DMX input
- 1 Art Net universe on the access point input

OUTPUT
- 5 point reboosted XLR output

SECURITY
- SSID and wifi password predefined choice
- WPA2 security on Wifi

PROTOCOL
- W2.4EC-DMX-A ET B

IP CLASS
- IP20

NORM
- CE

DIMENSIONS
- L 100 x l 85 x H 48mm

WEIGHT
- +/- 300g

TEMPERATURE RANGE
- 0° to +40°C
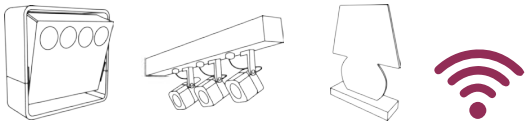
WARRANTY
- 2 years