




DIRECT 600

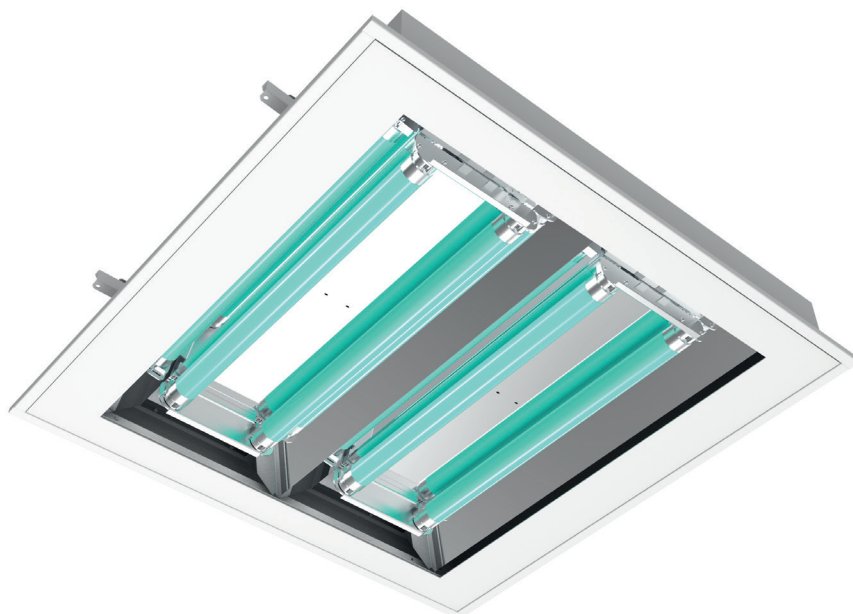

Coverage area:	up to 22 m ²
Power:	220-240V 50/60Hz
UVC on HF gear:	min. 13,1 W
Mass:	ca. 5,0 kg
Radiators replacement:	once a year
Protective foil for radiator:	on request
Mounting:	ceiling
Radiator:	4 x Philips radiator (253,7nm)
Disinfection time:	>15 min
Applications:	air and surface disinfection and prevention of secondary infections. Eliminates bacteria, viruses, fungi, mold
General data:	Use in production halls, hospitals, health care facilities, pharmacies, in public transport and many others
Accessories:	wireless control, movement sensor

Index no.	Coverage area (m ²)	Light Source	UVC Power (W)	Total power consumption (W)	Weight (kg)
7852.420/TUV	22	4x 20W	24	82	5

Accessories	Index no.
Movement sensor	7848
Remote control	7847
Protective foil for radiator:	7854