



# UV DIRECT II

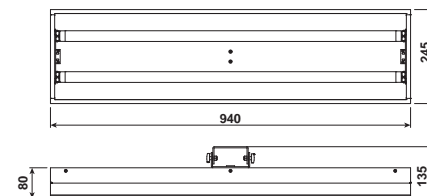

AIR



SURFACE

<b>Coverage area:</b>	up to 25 m <sup>2</sup> (mod. 30W) / up to 27 m <sup>2</sup> (mod. 36W)
<b>Power:</b>	220-240V 50/60Hz
<b>UVC on HF gear:</b>	min. 26,2 W
<b>Mass:</b>	ca. 5,10 kg
<b>Radiators replacement:</b>	once a year
<b>Protective foil for radiator:</b>	on request
<b>Mounting:</b>	wall, ceiling or tripod
<b>Radiator:</b>	Two Philips radiator (253,7nm)
<b>Disinfection time:</b>	>15 min
<b>Applications:</b>	air and surface disinfection and prevention of secondary infections. Eliminates bacteria, viruses, fungi, mold
<b>General data:</b>	Use in production halls, hospitals, health care facilities, pharmacies, in public transport and many others
<b>Accessories:</b>	wireless control, movement sensor

Index no.	Coverage area (m <sup>2</sup> )	Light Source	UVC Power (W)	Total power consumption (W)	Weight (kg)
7806.230/TUV	25	2x 30W	26,2	64	5,3
7806.236/TUV	27	2x 36W	31	74	6,3

Accessories	Index no.
Movement sensor	7848
Remote control	7847
Tripod	7829
Mounting arm	7846
Protective foil for radiator:	7854