


# Freedom Flex Stick X4

## HIGHLIGHTS

- Quick change flex battery pack for easy battery charges and changes
- Slip-on white sleeves allow for 2 completely different looks
- Connect up to 3 sticks to achieve a “runway” effect
- Included USB-C to XLR adaptor allows for wired control and linking to other DMX fixtures
- Multiple control options such as DMX, wireless master/slave, RFC-XL for complete flexibility
- Included Pelican-style case with custom molded interior ensures safe transportation between events

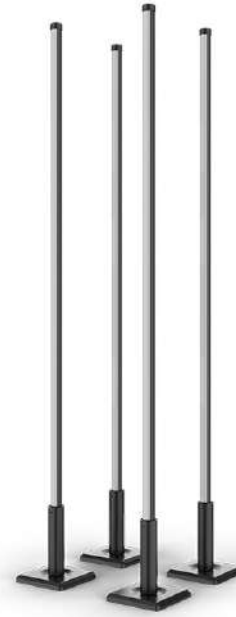

## SPECIFICATIONS

- DMX Channels : 4, 9, 10, 18, 34, 66, 142
- DMX Connectors : USB-C to XLR adaptor (included)
- Light Source : 92 LEDs (quad-color RGB+WW) 0.1 W, 50,000 hours life expectancy
- Strobe Rate : 0 to 20 Hz
- Recharge Time : 3 hours
- Operating Frequency : 2.412 to 2.48 GHz
- Input Voltage : External power supply: 100 to 240 VAC, 50/60 Hz
- Approvals : CE, ROHS, FCC
- Maximum Run Time (all on) : up to 6 hours Maximum
- Maximum Run Time (single color) : up to 8 hours Maximum
- Maximum Run Time (chase) : up to 8 hours
- Power and Current : 27 W, 0.3 A @ 120 V, 60 Hz
- Power and Current : 27 W, 0.2 A @ 230 V, 50 Hz
- Weight (stick) : 1.4 lb (0.6 kg)
- Weight (base) : 1.2 lb (0.5 kg)
- Weight (entire case) : 40.8 lb (18.5 kg)
- Size (stick) : 1.8 x 1.4 x 60 in (46 x 35 x 1520 mm)
- Size (case) : 63.3 x 6.6 x 16.4 in (1608 x 168 x 418 mm)
- Optional Controllers : RFC-XL, FlareCON
- Bracket Mounting Hole : M10

## WHAT'S INCLUDED

- 4 sticks
- 4 white sleeves
- 4 USB-C to XLR adaptors
- 4 batteries
- 8 clips
- 1 multi-charger
- 1 case